


# Easyrig

## Changing the Easyrig Mini spring balancer




Tools that are needed:


- Screwdriver
- Hexagon keys 4 mm and 5 mm
- Universal screw spanner
- Spring cord tool

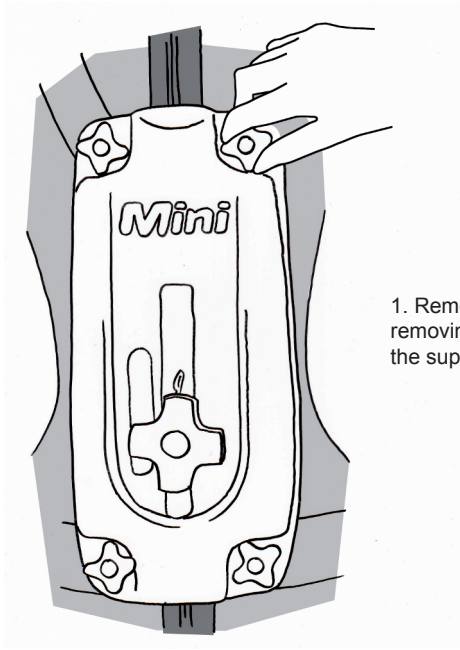


1. Remove the plastic cover by removing the four knobs. Take out the support bar.

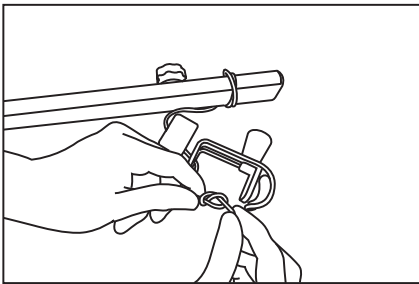


2. Remove the plastic cover on the camera hook and open the knob.

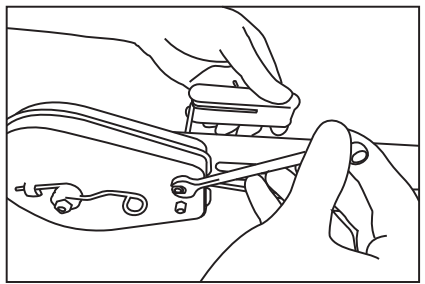


3. Remove the spring balancer by opening the M4 x 35 mm screw.

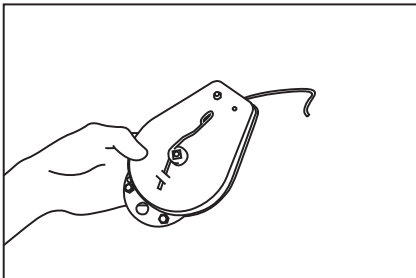


4. Put the new feather package in position.

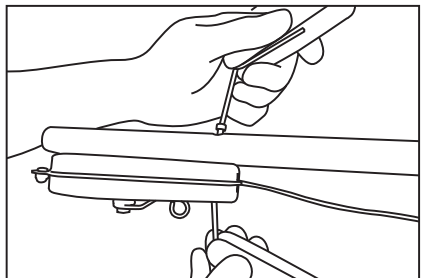


5. Inside the spring balancer is a loose wheel. It's important to have it in correct position. By using the hexagon you can keep the wheel in position.

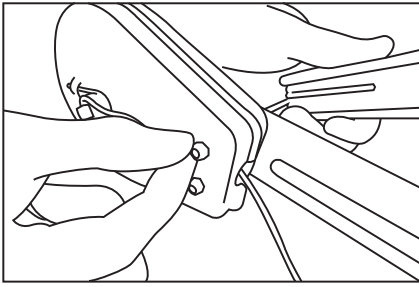


6. Mount the M4 x 35 screw. When the screw is through the nut it's perfect, otherwise the cover can bend.

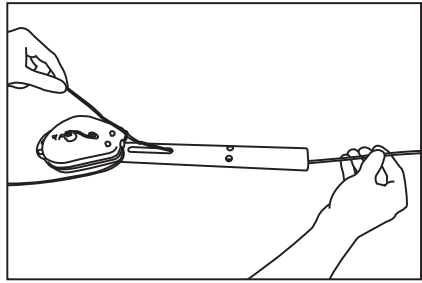


7. Mount the line through the arm by using the spring cord tool.

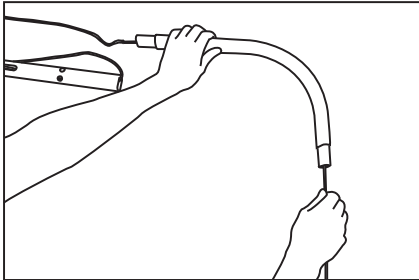


8. Mount the line through the bend arm over the wheels.

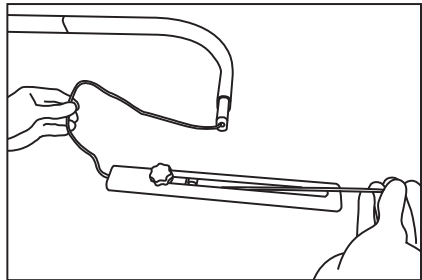


9. Mount the line through the adjustment block.

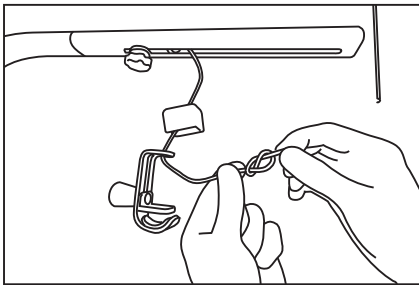

10. Drag the line through the hook cover and the hook and make a knot in the end.

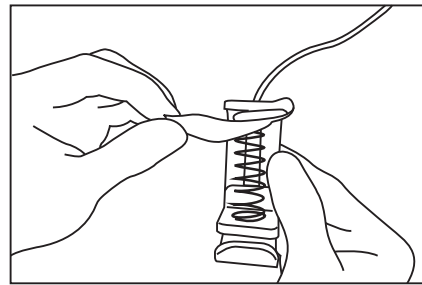

11. Apply black tape to cover up the knot.

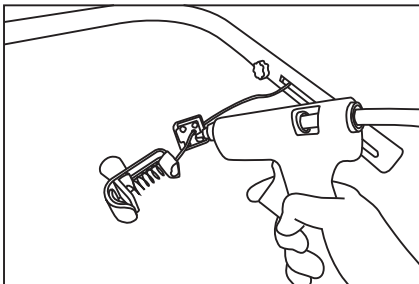

12. Apply glue inside the hook cover to make it stick to the hook.

